


MULTICHANNEL THERMOCOUPLE DATA LOGGER TC-log 8 S USB



Features

- Use with thermocouple of type K or T, installed from manufacturer
- Compact, robust and high temperatures resistant
- Easy to use
- Quick response time
- Real time monitoring if connected to a PC via the USB interface
- User replaceable battery.

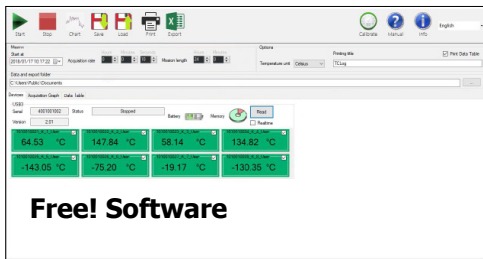

Free! Micro-USB
For configuration and download data

Technical data

Temperature range : -60...+130°C
Number of channel : 8 channels (*able to customize*)
Thermocouple type : type K and T, installed from manufacturer
Logger accuracy : ±0.5 (within 0...+75°C), otherwise ±1°C
Logger accuracy (option) : ±0.2°C (calibration at -40/25/125°C with Accredia traceable certificate)
Resolution : 0.15 °C
Interval : 1s...1hr
Memory capacity : 8 channels, 16,383 acquisitions per thermocouple
Battery type : AA 3.6V lithium 2Ah
Battery life (@different interval) : more than 3 years @ 1 minutes or 50 days @ 1 second (4,320,000 acquisitions at 1 second step continuously calculated time @25°C. Battery life may be shorter if used in low temperatures)
Material : Alumide
Operate system : Windows 10, 11 (32/64 bit).....
Exporting : Excel
Dimension : 50 x 95 x 26 (WxHxD)
Weight : 90g

Application



Autoclave/Retort



laboratory



Food & Beverage industries



Transportation


Ordering code

TC-log 8 S USB - -

K : Thermocouple type K
T : Thermocouple type T

X : Number of channels
**maximum 8 channels*

Report data

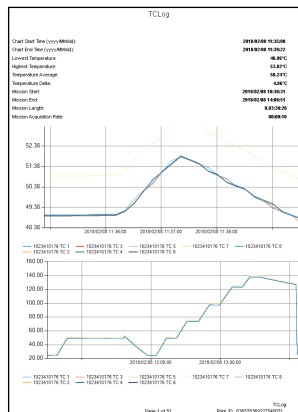

Time	TC1	TC2	TC3	TC4	TC5	TC6	TC7	TC8
2018/08/10 00:00	23.86	23.86	23.86	23.75	23.86	23.86	23.86	23.86
2018/08/10 00:01	24.00	24.00	24.00	23.86	24.00	24.00	24.00	24.00
2018/08/10 00:02	24.14	24.14	24.14	24.00	24.14	24.14	24.14	24.14
2018/08/10 00:03	24.28	24.28	24.28	24.00	24.28	24.28	24.28	24.28
2018/08/10 00:04	24.42	24.42	24.42	24.00	24.42	24.42	24.42	24.42
2018/08/10 00:05	24.56	24.56	24.56	24.00	24.56	24.56	24.56	24.56
2018/08/10 00:06	24.70	24.70	24.70	24.00	24.70	24.70	24.70	24.70
2018/08/10 00:07	24.84	24.84	24.84	24.00	24.84	24.84	24.84	24.84
2018/08/10 00:08	24.98	24.98	24.98	24.00	24.98	24.98	24.98	24.98
2018/08/10 00:09	25.12	25.12	25.12	24.00	25.12	25.12	25.12	25.12
2018/08/10 00:10	25.26	25.26	25.26	24.00	25.26	25.26	25.26	25.26
2018/08/10 00:11	25.40	25.40	25.40	24.00	25.40	25.40	25.40	25.40
2018/08/10 00:12	25.54	25.54	25.54	24.00	25.54	25.54	25.54	25.54
2018/08/10 00:13	25.68	25.68	25.68	24.00	25.68	25.68	25.68	25.68
2018/08/10 00:14	25.82	25.82	25.82	24.00	25.82	25.82	25.82	25.82
2018/08/10 00:15	25.96	25.96	25.96	24.00	25.96	25.96	25.96	25.96
2018/08/10 00:16	26.10	26.10	26.10	24.00	26.10	26.10	26.10	26.10
2018/08/10 00:17	26.24	26.24	26.24	24.00	26.24	26.24	26.24	26.24
2018/08/10 00:18	26.38	26.38	26.38	24.00	26.38	26.38	26.38	26.38
2018/08/10 00:19	26.52	26.52	26.52	24.00	26.52	26.52	26.52	26.52
2018/08/10 00:20	26.66	26.66	26.66	24.00	26.66	26.66	26.66	26.66
2018/08/10 00:21	26.80	26.80	26.80	24.00	26.80	26.80	26.80	26.80
2018/08/10 00:22	26.94	26.94	26.94	24.00	26.94	26.94	26.94	26.94
2018/08/10 00:23	27.08	27.08	27.08	24.00	27.08	27.08	27.08	27.08
2018/08/10 00:24	27.22	27.22	27.22	24.00	27.22	27.22	27.22	27.22
2018/08/10 00:25	27.36	27.36	27.36	24.00	27.36	27.36	27.36	27.36
2018/08/10 00:26	27.50	27.50	27.50	24.00	27.50	27.50	27.50	27.50
2018/08/10 00:27	27.64	27.64	27.64	24.00	27.64	27.64	27.64	27.64
2018/08/10 00:28	27.78	27.78	27.78	24.00	27.78	27.78	27.78	27.78
2018/08/10 00:29	27.92	27.92	27.92	24.00	27.92	27.92	27.92	27.92
2018/08/10 00:30	28.06	28.06	28.06	24.00	28.06	28.06	28.06	28.06

www.omi.co.th

Omega Measuring Instrument Co., Ltd.
 Tel : 02-105-4676
 Fax : 02-903-0080 ext. 6867
 Email : info@omi.co.th
 Line : @omith

Summary graph

Table

MULTICHANNEL THERMOCOUPLE DATA LOGGER TC-log 8 S USB

High temperature Heat protection : HP-TC log 8 S USB (option)

Features

When you need a compact oven monitoring profiler, the TC-Log 8 S with its thermal protection is the ideal combination. The thermocouples, up to 8 and of any type, are connected directly inside the logger and the compact dimensions of the device and its thermal barrier allow it to be used even in confined spaces.

Using the TC-Log series loggers is easy: just start and download them by connecting directly to the USB port on board. The protection allows you to exceed the limit of 130 ° C allowing you to use the devices at much higher temperatures even for a long time.



Technical Data

Temperature resistance : maximum 250°C for 50 minutes


Dimension : 200 X 145 X 65 (mm)

Weight : 700g

Data loggers supported : TC-Log 8 S USB

Heat protection curve and Table

The curve will show how long heat protection stand a temperature.

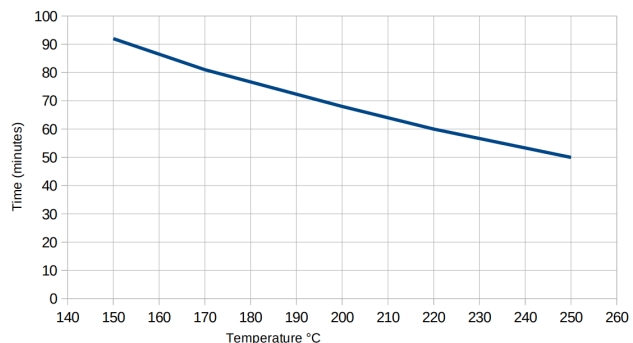

Temperature (°C)	Time (minute)
150	92
170	81
200	68
220	60
250	50

www.omi.co.th

Omega Measuring Instrument Co., Ltd.

Tel : 02-105-4676

Fax : 02-903-0080 ext. 6867

Email : info@omi.co.th

Line : @omith