



## GAS DETECTOR GAP-03

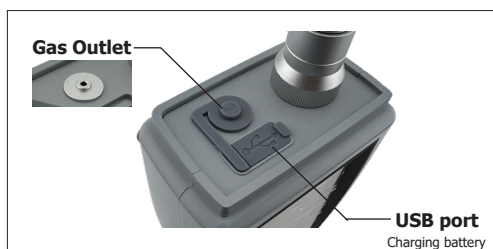

Sensor made in Switzerland

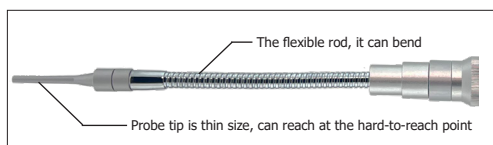

### Ordering code

GAP - 03 - ☐

- 2 : Range 0...2 ppm  
 5 : Range 0...5 ppm  
 20 : Range 0...20 ppm  
 50 : Range 0...50 ppm  
 100 : Range 0...100 ppm  
 200 : Range 0...200 ppm  
 1000 : Range 0...1000 ppm  
 5000 : Range 0...5000 ppm  
 30000 : Range 0...30000 ppm

[www.omi.co.th](http://www.omi.co.th)

**Omega Measuring Instrument Co., Ltd.**

Tel : 02-105-4676

Fax : 02-903-0080 ext. 6867

Email : [info@omi.co.th](mailto:info@omi.co.th)

Line : @omith

### Features

- High quality sensor of Membrapor brand from Switzerland
- New display screen, modern design, full-color 3.5-inch TFT screen, color LCD display
- Digital and graph display of gas concentration.
- Built-in pump for suction gas in the measurement, and it can be adjust a suction level 20...100% of power
- Built-in memory, it can be stored data in device
- Intelligent Probe design that convenient calibration and maintenance
- Able to turn on/off a sound
- Various calibration point, 2 to 12 points
- High-capacity lithium battery-powered, rechargeable
- Low alarm, High alarm, TWA, STEL with Sound alarm

### Technical Data

**Gas type :** Ozone (O<sub>3</sub>)

**Measuring type :** Pump (build-in)

**Measuring range :** 0...2/ 5/ 20/ 50/ 100/ 200/ 1000/ 5000/ 30000 ppm

**Accuracy :** ±2% of full scale

**Resolution :** 0.01/ 0.01/ 0.01/ 0.1/ 0.1/ 0.1/ 1/ 1/ 1 ppm

**Sensor type :** Electrochemical

**Life expectancy :** 1...3 years

**Preheating time :** 60 sec

**Memory capacity :** 200,000 reading (*Internal memory*)

**Operating temperature :** -20...+55 °C

**Operating humidity :** 15...95 %RH, non-condensing

**Operating pressure :** Atmospheric pressure

**Power supply :** Lithium battery 4.2V/ 3000 mAh

**Continuous work hours :** 8...12 hours

**Charge time :** 6...8 hours

**Body material :** Polycarbonate

**Dimension :** 228 x 84 x 50.5 mm

**Weight :** 550 g

**Explosion protection :** Ex ib IIB T4 Gb


**Protection :** IP65



## GAS DETECTOR GAP-03


### Highlight features

- New display screen**

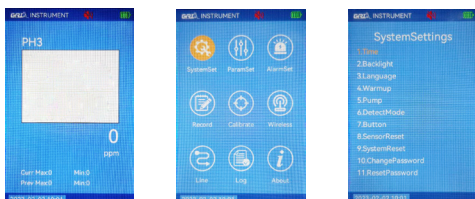

New display screen. there is developed to be modern design for nowadays. the display is 3.5 inch with full - color, TFT screen. And the display is color LCD display

- Adjustable pump level**



Built-in pump for suction gas in the measurement, and it can be adjust a suction level 20...100% of power

- Alarm (A1, A2, STEL and TWA)**



**Alarm 1 (A1) and Alarm 2 (A2) :**  
Alarm 1 and 2 can be set according to user



**Short Term Exposure Limit (STEL) :**


The gas detector has function the short term exposure limit (STEL) It is a the maximum permissible gas concentration a worker can be safely exposed to for short periods of time (5-15 minutes maximum).



**Time-Weighted Average (TWA) :**

The gas detector has function the time-weighted average (TWA) It is a safety measure used to determine accumulated averages of gases. An average is determined using method to ensure the worker leaves an area when the maximum average is accumulated.

- Calibration available**

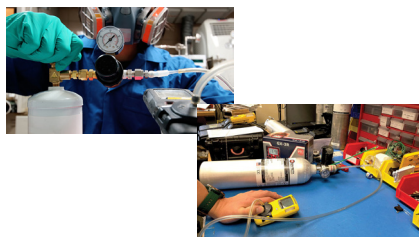

The gas detector can do a calibration via laboratory and the calibration function can be calibrated

- Two points
- Mutipoints

[www.omi.co.th](http://www.omi.co.th)

**Omega Measuring Instrument Co., Ltd.**

Tel : 02-105-4676

Fax : 02-903-0080 ext. 6867

Email : [info@omi.co.th](mailto:info@omi.co.th)

Line : @omith