

VA 520 - Inline flow meter


NEW: Modbus-RTU output

4...20 mA output for present flow

Pulse output for total flow (counter reading), galvanically isolated or M-Bus (optionally)

Measuring unit can be unscrewed: Removal of the entire measuring section not necessary, no by-pass necessary

Display head rotatable by 180° e.g. in case of reverse flow direction

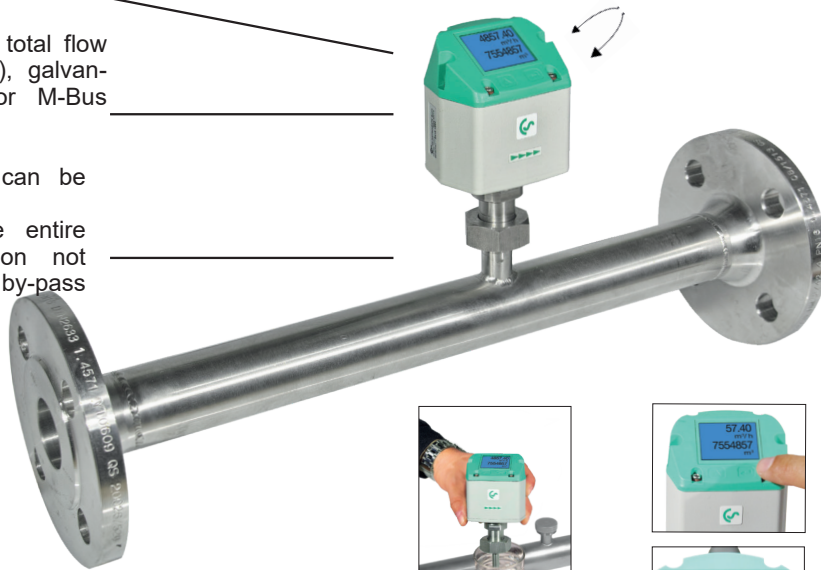

Display shows 2 values at the same time:

- Present flow in m³/h, l/min,...
- Total consumption (counter reading) in m³, l
- Temperature measurement

Readout values in the display can be rotated by 180°, e.g. for overhead installation

Easy installation into the existing pipeline due to integrated measuring section and weld neck flange (according to EN 1092-1 PN 40)

High measuring accuracy due to defined measuring section (inlet and outlet section)



The sensor can be removed and cleaned



With a key stroke:

- Reset counter reading
- Select units
- Zero-point adjustment, leak flow volume suppression



Option:


Bi-directional measurement. Blue or green arrows in the display indicate the direction of flow.

A meter reading is available for each flow direction.



Application-technological features of the flow meters VA 520:

- Digital interfaces such as Modbus-RTU, Ethernet (PoE) and M-Bus enable connection to higher-level systems such as energy management systems, building management systems, PLC,...
- Easy and affordable installation
- Units freely selectable via keys on the display m³/h, m³/min, l/min, l/s, kg/h, kg/min, kg/s, cfm
- Compressed air counter up to 1,999,999,999 m³ can be reset to "zero" via keypad
- Analog output 4...20 mA, pulse output (electrically isolated)
- High measuring accuracy even in the lower measuring range (ideal for leakage measurement)
- Negligibly small loss of pressure
- Calorimetric measuring principle, no additional pressure and temperature measurement necessary, no mechanically moved parts
- Comprehensive diagnostic functions can be read out on the display or remote access via Modbus-RTU such as exceeding max./min values °C, calibration cycle, error codes, serial number. All parameters can be read out and changed via Modbus

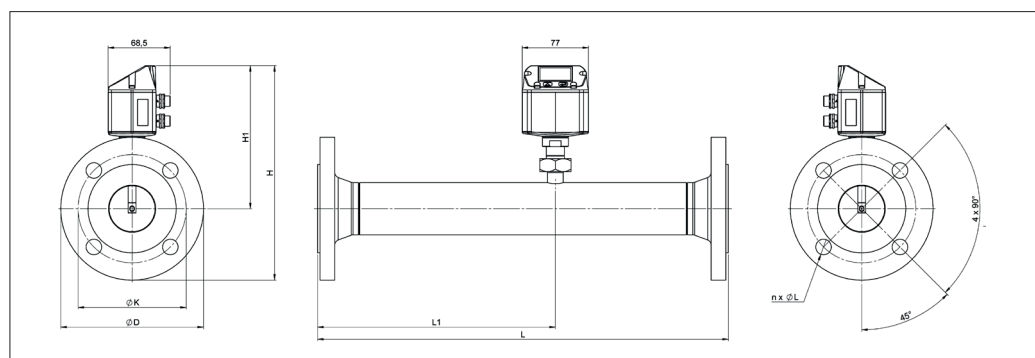

Flow measuring ranges VA 520 (Max version 185 m/s) for compressed air (ISO 1217: 1000 mbar, 20°C) Measuring ranges for other types of gas see pages 96 to 99									Flange DIN EN 1092-1		
Measuring section	Outer pipe mm	Inner pipe mm	Measuring range full scales		L mm	L1 mm	H mm	H1 mm	ØD mm	ØK mm	n x ØL
			m³/h	(cfm)							
DN 15	21.3	16.1	90	50	300	210	213.2	165.7	95	65	4 x 14
DN 20	26.9	21.7	175	100	475	275	218.2	165.7	105	75	4 x 14
DN 25	33.7	27.3	290	170	475	275	223.2	165.7	115	85	4 x 14
DN 32	42.4	36.0	530	310	475	275	235.7	165.7	140	100	4 x 18
DN 40	48.3	41.9	730	430	475*	275	240.7	165.7	150	110	4 x 18
DN 50	60.3	53.1	1195	700	475*	275	248.2	165.7	165	125	4 x 18
DN 65	76.1	68.9	2050	1205	475*	275	268.2	175.7	185	145	8 x 18
DN 80	88.9	80.9	2840	1670	475*	275	275.7	175.7	200	160	8 x 18

*Attention: Shortened inlet section. Please observe the recommended minimum inlet section (length = 15 x inner diameter) on site.

DESCRIPTION	ORDER NO.
VA 520 flow meter with integrated DN 15 measuring section with flange	0695 2521
VA 520 flow meter with integrated DN 20 measuring section with flange	0695 2522
VA 520 flow meter with integrated DN 25 measuring section with flange	0695 2523
VA 520 flow meter with integrated DN 32 measuring section with flange	0695 2526
VA 520 flow meter with integrated DN 40 measuring section with flange	0695 2524
VA 520 flow meter with integrated DN 50 measuring section with flange	0695 2525
VA 520 flow meter with integrated DN 65 measuring section with flange	0695 2527
VA 520 flow meter with integrated DN 80 measuring section with flange	0695 2528
Bi-directional measurement - includes 2 x 4...20 mA analogueue outputs and 2x pulse outputs. These do not apply to Ethernet (PoE) and M-Bus	Z695 6000
High-pressure version PN 40	Z695 0411
ANSI flange 150 lbs (instead of DIN flanges)	Z695 5013
ANSI flange 300 lbs (instead of DIN flanges)	Z695 5014
Measuring ranges:	
Low-Speed (50 m/s)	Z695 0520
Standard (92.7 m/s)	Z695 0521
High-Speed (224 m/s)	Z695 0522
Options:	
Special measuring range for VA 520 on customer request	Z695 4006
1% accuracy of m.v. ± 0.3 % of f.s.	Z695 5005
Ethernet interface for VA 500/520 and FA 500	Z695 5006
Ethernet interface PoE for VA 500/520 and FA 500	Z695 5007
M-Bus board for VA 500/520 and FA 500	Z695 5004
ISO calibration certificate (5 calibration points) for VA sensors	3200 0001
Gas type:___ (specify gas type when placing order)	Z695 5009
Gas mixture:___ (specify gas mixture when placing order)	Z695 5010
Real gas adjustment	3200 0015
Special cleaning oil and grease free (e.g. for oxygen applications)	0699 4005
LABS and silicone-free version including cleaning oil and grease-free	0699 4007
Additional calibration curve stored in the sensor (can be selected via display)	Z695 5011
Certificate of origin	Z695 5012

TECHNICAL DATA VA 520

Parameters:	m³/h, l/min (1000 mbar, 20 °C) in case of compressed air or Nm³/h, NI/min (1013 mbar, 0 °C) in case of gases
Units adjustable via keys at display:	m³/h, m³/min, l/min, l/s, ft/min, cfm, m/s, kg/h, kg/min, g/s, lb/min, lb/h
Sensor:	Thermal mass flow sensor
Measured medium:	Air, gases
Gas types are adjustable over CS service software or CS data logger:	Air, nitrogen, argon, CO2, oxygen
Measuring range:	See table above
Accuracy: (o. M. V. = of measured value) (o. F. S. = of full scale)	± 1.5% of m.v. ± 0.3% of f.s. on request: ± 1% of m.v. ± 0.3% of f.s.
Operating temperature:	-30...80 °C
Operating pressure:	-1 to 16 bar optionally up to PN 40
Digital output:	RS 485 interface, (Modbus-RTU), optional: Ethernet interface PoE), M-Bus
Analogue output:	4...20 mA for m³/h or l/min
Pulse output:	1 pulse per m³ or per litre electrically isolated. Pulse weight can be set on the display. Alternatively, the pulse output can be used as an alarm relay
Supply:	18...36 VDC, 5 W
Burden:	< 500 Ω
Housing:	Polycarbonate (IP 65)
Measuring section:	Stainless steel, 1.4301 or 1.4571
Process connection:	Flange (in acc. with DIN EN 1092-1 or ANSI 150 lbs or ANSI 300 lbs)
Mounting position:	any

For further accessories refer to pages 88 to 92

VA 520 - Inline flow meter

NEW: Modbus-RTU output

4...20 mA output for present flow

Pulse output for total flow (counter reading), galvanically isolated or M-Bus (optionally)

Measuring unit can be unscrewed: Removal of the entire measuring section not necessary, no by-pass necessary

Easy installation into the existing pipe due to integrated measuring section (1/4" to 2")

High measuring accuracy due to defined measuring section (inlet and outlet section)

Display head rotatable by 180 ° e.g. in case of reverse flow direction

Display shows 2 values at the same time:

- Present flow in m³/h, l/min,...
- Total consumption (counter reading) in m³, l
- Temperature measurement


Readout values in the display can be rotated by 180°, e.g. for overhead installation

With a key stroke:

- Reset counter reading
- Select units
- Zero-point adjustment, leak flow volume suppression

Option:

Bi-directional measurement. Blue or green arrows in the display indicate the direction of flow. A meter reading is available for each flow direction.

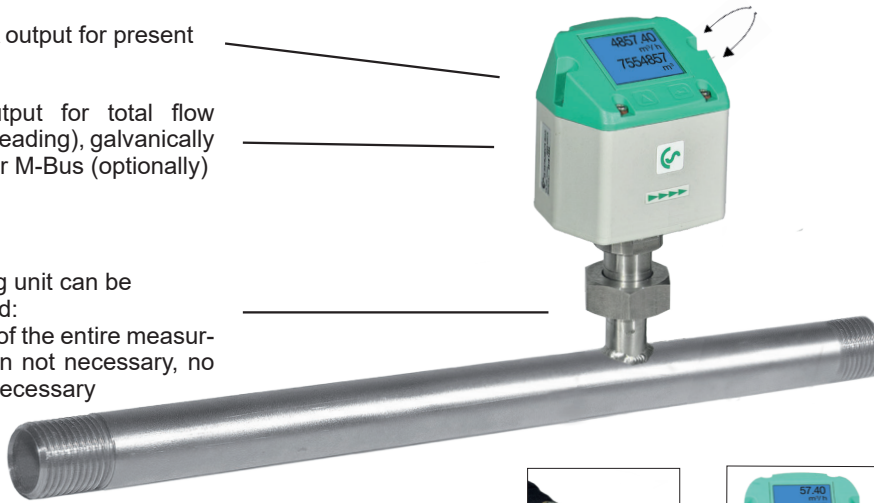


The sensor can be removed and cleaned



Application-technological features of the flow meters VA 520:

- Digital interfaces such as Modbus-RTU, Ethernet (PoE) and M-Bus enable connection to higher-level systems such as energy management systems, building management systems, PLC,...
- Easy and affordable installation
- Units freely selectable via keys on the display m³/h, m³/min, l/min, l/s, kg/h, kg/min, kg/s, cfm
- Compressed air counter up to 1,999,999,999 m³ can be reset to "zero" via keypad
- Analog output 4...20 mA, pulse output (electrically isolated)
- High measuring accuracy even in the lower measuring range (ideal for leakage measurement)
- Negligibly small loss of pressure
- Calorimetric measuring principle, no additional pressure and temperature measurement necessary, no mechanically moved parts
- Comprehensive diagnostic functions can be read out on the display or remote access via Modbus-RTU such as exceeding max./min values °C, calibration cycle, error codes, serial number. All parameters can be read out and changed via Modbus

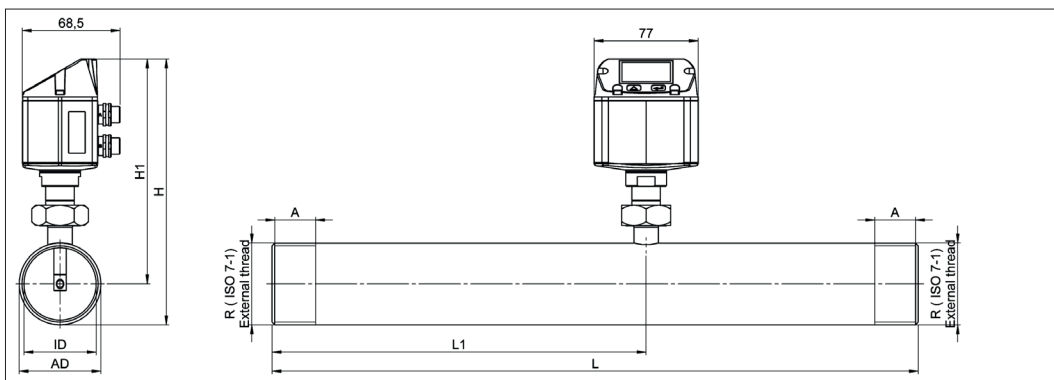

Flow measuring ranges VA 520 (max version 185 m/s) for compressed air (ISO 1217: 1000 mbar, 20 °C)									
Measuring range for other gases see pages 96 to 99									
Connection thread	Outer pipe mm	Inner pipe mm	Measuring range full scales		L mm	L1 mm	H mm	H1 mm	A mm
			m ³ /h	cfm					
R 1/4"	13.7	8.9	105 l/min	3.6	194	137	174.7	165.7	15
R 1/2"	21.3	16.1	90	50	300	210	176.4	165.7	20
R 3/4"	26.9	21.7	175	100	475	275	179.2	165.7	20
R 1"	33.7	27.3	290	170	475	275	182.6	165.7	25
R 1 1/4"	42.4	36.0	530	310	475	275	186.9	165.7	25
R 1 1/2"	48.3	41.9	730	430	475*	275	186.9	165.7	25
R 2"	60.3	53.1	1195	700	475*	275	195.9	165.7	30

*Attention: Shortened inlet section. Please observe the recommended minimum inlet section (length = 15 x inner diameter) on site!

DESCRIPTION	ORDER NO. Stainless steel 1.4571	ORDER NO. Stainless steel 1.4301	TECHNICAL DATA VA 520	
			Parameters:	m ³ /h, l/min (1000 mbar, 20 °C) in case of compressed air or Nm ³ /h, NI/min (1013 mbar, 0 °C) in case of gases
VA 520 flow meter with 1/4" measuring section	0695 1520	0695 0520	Units adjustable via keys at display:	m ³ /h, m ³ /min, l/min, l/s, ft ³ /min, cfm, m/s, kg/h, kg/min, g/s, lb/min, lb/h
VA 520 flow meter with 1/2" measuring section	0695 1521	0695 0521	Sensor:	Thermal mass flow sensor
VA 520 flow meter with 3/4" measuring section	0695 1522	0695 0522	Measured medium:	Air, gases
VA 520 flow meter with 1" measuring section	0695 1523	0695 0523	Gas types are adjustable over CS service software or CS data logger:	Air, nitrogen, argon, CO ₂ , oxygen
VA 520 flow meter with 1 1/4" measuring section	0695 1526	0695 0526	Measuring range:	See table above
VA 520 flow meter with 1 1/2" measuring section	0695 1524	0695 0524	Accuracy: (o. M. V. = of measured value) (o. F. S. = of full scale)	± 1.5% of m.v. ± 0.3 % of f.s. on request: ± 1% of m.v. ± 0.3% of f.s.
VA 520 flow meter with 2" measuring section	0695 1525	0695 0525	Operating temperature:	-30...80 °C
Bi-directional measurement - includes 2x4...20 mA analogue outputs and 2x pulse outputs. These do not apply to Ethernet (PoE) and M-Bus		Z695 6000	Operating pressure:	-1 to 16 bar optionally up to PN 40
High-pressure version PN 40		Z695 0411	Digital output:	RS 485 interface, (Modbus-RTU), optional: Ethernet interface PoE, M-Bus
NPT thread (instead of R thread) - can only be ordered for stainless steel 1.4571	Z695 5015		Analogue output:	4...20 mA for m ³ /h or l/min
Measuring ranges:			Pulse output:	1 pulse per m ³ or per litre electrically isolated. Pulse weight can be set on the display. Alternatively, the pulse output can be used as an alarm relay
Low-Speed (50 m/s)		Z695 0520	Supply:	18...36 VDC, 5 W
Standard (92.7 m/s)		Z695 0521	Burden:	< 500 Ω
High-Speed (224 m/s)		Z695 0522	Housing:	Polycarbonate (IP 65)
Options:			Measuring section:	Stainless steel, 1.4301 or 1.4571
Special measuring range for VA 520 on customer request		Z695 4006	Connection thread of measuring sections	R 1/4" to R 2" (BSP British Standard Piping) or 1/2" to 2" NPT thread
1% accuracy of m.v. ± 0.3 % of f.s.		Z695 5005	Mounting position:	any
Ethernet interface for VA 500/520 and FA 500		Z695 5006		
Ethernet interface PoE for VA 500/520 and FA 500		Z695 5007		
M-Bus board for VA 500/520 and FA 500		Z695 5004		
ISO calibration certificate (5 calibration points) for VA sensors		3200 0001		
Gas type: ___ (specify gas type when placing order)		Z695 5009		
Gas mixture: ___ (specify gas mixture when placing order)		Z695 5010		
Real gas adjustment		3200 0015		
Special cleaning oil and grease free (e.g. for oxygen applications)		0699 4005		
LABS and silicone-free version including cleaning oil and grease-free		0699 4007		
Additional calibration curve stored in the sensor (can be selected via display)		Z695 5011		
Certificate of origin		Z695 5012		

For further accessories refer to pages 88 to 92