


GAS DETECTOR

GNP-CI2



sensor made in Switzerland

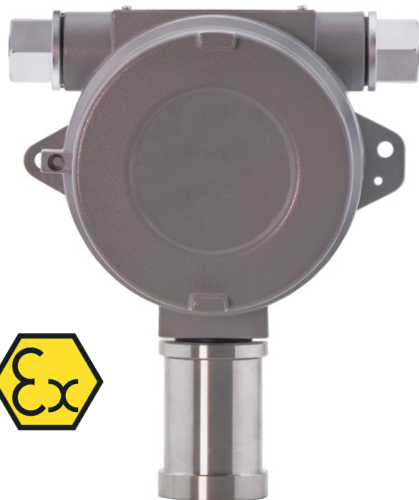

Features

- High quality sensor of Membrapor brand from Switzerland
- Good sealing, anti-corrosion, explosion-proof and anti EMI, RFI function
- Round casting stainless steel housing is suitable for offshore platforms, as well as high temperature, high humidity and other harsh environments

Technical Data

Gas type : Chlorine (Cl₂)
Measuring type : Diffusion
Measuring range : 0...20/ 200/ 2000/ 5000 ppm
Accuracy : ±2% of full scale
Resolution : 0.01/ 0.1/ 1/ 1 ppm
Sensor type : Electrochemical
Life expectancy : 1...3 years
Preheating time : 60 seconds
Operating temperature : -20...+60 °C
Operating humidity : 0...85 %RH
Operating pressure : -0.3...+0.3 barG
Signal output : 4-20 mA (2-wire)
Power supply : 10...24 Vdc
Current consumption : 20...200 mA
Power consumption : ≤ 3W
Dimension : 195 x 178 x 90mm
Weight : 1.65 kg
Body material : Cast aluminum
Electrical connection : M26 x P2.0
Explosion proof : Ex d IIC T6 Gb
Protection : IP65

Ordering code

GNP - CI2 -

20 : Range 0...20 ppm
200 : Range 0...200 ppm
2000 : Range 0...2000 ppm
5000 : Range 0...5000 ppm



www.omi.co.th

Omega Measuring Instrument Co., Ltd.

Tel : 02-105-4676

Fax : 02-903-0080 ext. 6867

Email : info@omi.co.th

Line : @omith