


GAS DETECTOR GNP-C2H4O



sensor made in Switzerland



Wiring diagram

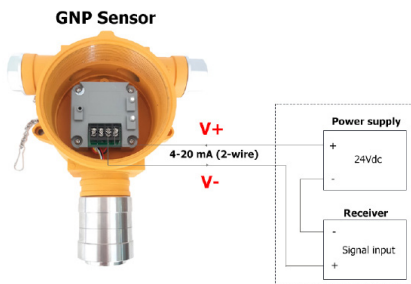

Features

- High quality sensor of Membrapor brand from Switzerland
- Good sealing, anti-corrosion, explosion-proof and anti EMI, RFI function
- Round casting stainless steel housing is suitable for offshore platforms, as well as high temperature, high humidity and other harsh environments

Technical Data

Gas type : Ethylene oxide (C₂H₄O)
Measuring type : Diffusion
Measuring range : 0...20/ 100/ 500/ 1000/ 5000 ppm
Accuracy : ±2 %FS
Resolution : 0.01/ 0.1/ 1/ 1/ 1 ppm
Sensor type : Electrochemical
Life expectancy : 1...3 years
Preheating time : 60 sec
Operating temperature : -20...+60 °C
Operating humidity : 0...85 %RH
Operating pressure : 700...1300 mbar
Signal output : 4-20 mA (2-wires)
Power supply : 10...24 Vdc
Current consumption : 22 mA
Power consumption : ≤ 3W
Dimension : 195 x 178 x 90mm
Weight : 1.65 kg
Body material : Cast aluminum
Electrical connection : M26 x P2.0
Explosion proof : Ex d IIC T6 Gb
Protection : IP65

Ordering code

GNP - C2H4O -

- 20 : Range 0...20 ppm
- 100 : Range 0...100 ppm
- 500 : Range 0...500 ppm
- 1000 : Range 0...1000 ppm
- 5000 : Range 0...5000 ppm

www.omi.co.th

Omega Measuring Instrument Co., Ltd.
 Tel : 02-105-4676
 Fax : 02-903-0080 ext. 6867
 Email : info@omi.co.th
 Line : @omith

