

HUMIDITY AND TEMPERATURE DATA LOGGER

HumiStick



Features

- Reduced size for easy use for every need
- A special filter protects the sensor from external contaminants and guarantees correct readings.
- Long battery life
- Accredia (NIST equivalent) traceable calibration certificate included
- Application for cold chain, environment, pharmaceutical, healthcare, constructions, warehouses, medical, food and beverages, logistic and transport

Technical data

Humidity range : 5...95% RH
Humidity resolution : ± 0.1 RH
Humidity accuracy : $\pm 3\%$ RH within 20...80% RH, otherwise $\pm 4\%$ RH
Temperature range : -30...+60°C
Temperature resolution : ± 0.1 °C
Temperature accuracy : ± 0.4 °C within +5...+40°C, otherwise ± 1 °C
Memory capacity : 1,365 reading
Battery life : up to 10 years or 3 millions of acquisitions
Interval : 1min...255mins
Operate system : Windows 7, 8, 10
Exporting : Excel
Dimension : 50 X 24 X 15 mm (WxHxD)
Weight : 11g
Protection : IP50



Accessories (option)



Model : TS04IUSB
Description : USB interface for connecting with PC



Model : TS04SRI
Description : Portable interface

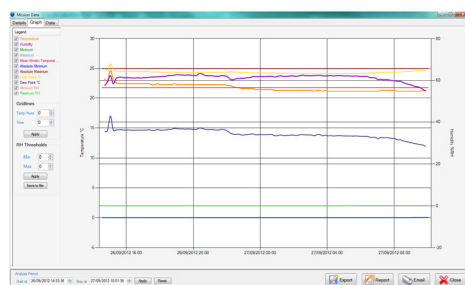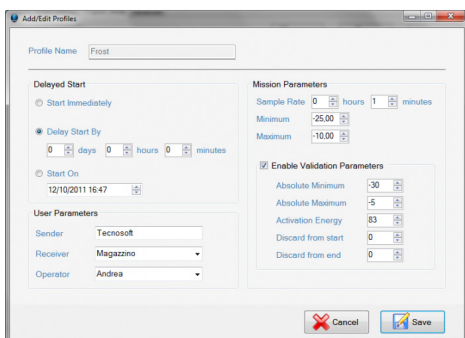

| Device Name | Serial Number | Type | First Acquisition | Last Acquisition | Acq. | Sender | Receiver | Operator |
|-------------|----------------|-----------|-------------------|------------------|------|-----------|----------|----------|
| TS04IUSB | 0000062B001111 | HUMISTICK | 05/09/2011 11:10 | 05/09/2011 11:12 | 1 | TecnoSoft | | Andrea |
| TS04IUSB | 0000062B001111 | TEMPSTICK | 05/09/2011 11:10 | 05/09/2011 11:12 | 1 | TecnoSoft | | Andrea |
| TS04IUSB | 0000062B001111 | TEMPSTICK | 05/09/2011 11:10 | 05/09/2011 11:12 | 1 | TecnoSoft | | Andrea |
| TS04IUSB | 0000062B001111 | HUMISTICK | 05/09/2011 11:10 | 05/09/2011 11:12 | 1 | TecnoSoft | | Andrea |
| TS04IUSB | 0000062B001111 | HUMISTICK | 05/09/2011 11:10 | 05/09/2011 11:12 | 1 | TecnoSoft | | Andrea |