


GAS DETECTOR GNP-CO2



sensor made in Switzerland

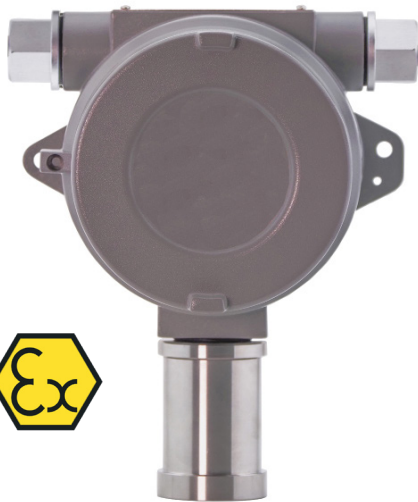

Ordering code

GNP - CO2 -

2000 : Range 0...2000 ppm
5000 : Range 0...5000 ppm
10000 : Range 0...10000 ppm
5V : Range 0...5 %vol
10V : Range 0...10 %vol
20V : Range 0...20 %vol
30V : Range 0...30 %vol
50V : Range 0...50 %vol
100V : Range 0...100 %vol

Features

- High quality sensor of Membrapor brand from Switzerland
- Good sealing, anti-corrosion, explosion-proof and anti EMI, RFI function
- Round casting stainless steel housing is suitable for offshore platforms, as well as high temperature, high humidity and other harsh environments

Technical Data

Gas type : Carbon dioxide (CO₂)
Measuring type : Diffusion
Measuring range : 0...2000 ppm/ 0...5000 ppm/ 0...10000 ppm
0...5/ 0...10/ 0...20/ 0...30/ 0...50/ 0...100 %vol
Accuracy : ±2% of full scale
Resolution : 1 ppm/ 1 ppm/ 1 ppm
0.01 %vol/ 0.01 %vol/ 0.01 %vol/ 0.01 %vol/ 0.1 %vol/ 0.1 %vol
Sensor type : Non-dispersive infrared sensor (NDIR)
Life expectancy : 5...10 years
Preheating time : 60 seconds
Operating temperature : -20...+60 °C
Operating humidity : 0...85 %RH
Operating pressure : -0.3...+0.3 barG
Signal output : 4-20 mA (2-wire)
Power supply : 10...24 Vdc
Current consumption : 20...200 mA
Power consumption : ≤ 3W
Dimension : 195 x 178 x 90mm
Weight : 1.65 kg
Body material : Cast aluminum
Electrical connection : M26 x P2.0
Explosion proof : Ex d IIC T6 Gb
Protection : IP65

www.omi.co.th

Omega Measuring Instrument Co., Ltd.

Tel : 02-105-4676

Fax : 02-903-0080 ext. 6867

Email : info@omi.co.th

Line : @omith

